**THE CONSTRUCTION SEQUENCE:**

1. Install 12' Silt Sock on North, West and East boundary lot lines on or before **October 15th**.  
A. Existing asphalt driveway to act as the tracking pad for the project.
2. Raze and dispose of existing cottage and all impervious surfaces on or before **November 1st**.
3. Complete driveway subgrade & base course and rough grade lot by **November 10th**.
4. Weather permitting, grade site for foundation on or before **November 15th**. Place temporary stockpiles in the areas shown on the site plans. Cover stockpiles with tarps as necessary. Transport excess soil offsite as necessary.
5. Complete and back fill foundation by **November 30th**. Cover disturbed soil with straw mulch. Weather not permitting, pour foundation next spring.
6. Stabilize entire lot with mulch no later than December 10th or earlier if foundation postponed to spring. Refresh/replace mulch throughout the project as necessary.
7. Final grade lot and finish with sod on or before **August 30, 2019**.
8. Remove Silt Sock only after a good stand of grass has been established.

Maintenance of all erosion control measures are required throughout the construction process. Inspections shall be performed at least weekly and after all storm events. All necessary repairs shall be made immediately.


- Sediment will be removed from behind sediment fences and barriers before it reaches a depth that is equal to half the barrier's height. Breaks and gaps in sediment fences and barriers will be repaired immediately. Straw bales will be replaced at least every three months, or sooner if warranted by the bale's condition and state of decay.
- All sediment that moves off-site due to construction activity or weather events will be cleaned up before the end of the next workday.
- All installed erosion control measures will be maintained until the disturbed areas are completely stabilized.

**RESTORATION NOTES:**  
All pervious disturbed areas shall receive a minimum of four (4) inches of topsoil, seed and mulch. All pervious disturbed areas shall receive fertilizer except native planting areas. Restoration will occur as soon after the disturbance as practical. Seed mixture 40 shall be used on all other disturbed areas. Mixtures shall be in accordance with section 630 of d.O.T. Specifications. An equal amount of annual ryegrass shall be added to the mix.

Seed mixtures shall be applied at the rate of four (4) pounds per 1,000 square feet. Fertilizer shall be applied at the rate of four (4) pounds per 1,000 square feet. Mulch shall consist of hay or straw applied at the rate of 2 tons per acre.

Fertilizer shall meet the minimum requirements that follow: nitrogen, not less than 16%; phosphoric acid, not less than 8%; potash, not less than 8%.

Disturbed slopes greater than 20% shall be restored within 30 days of disturbance.

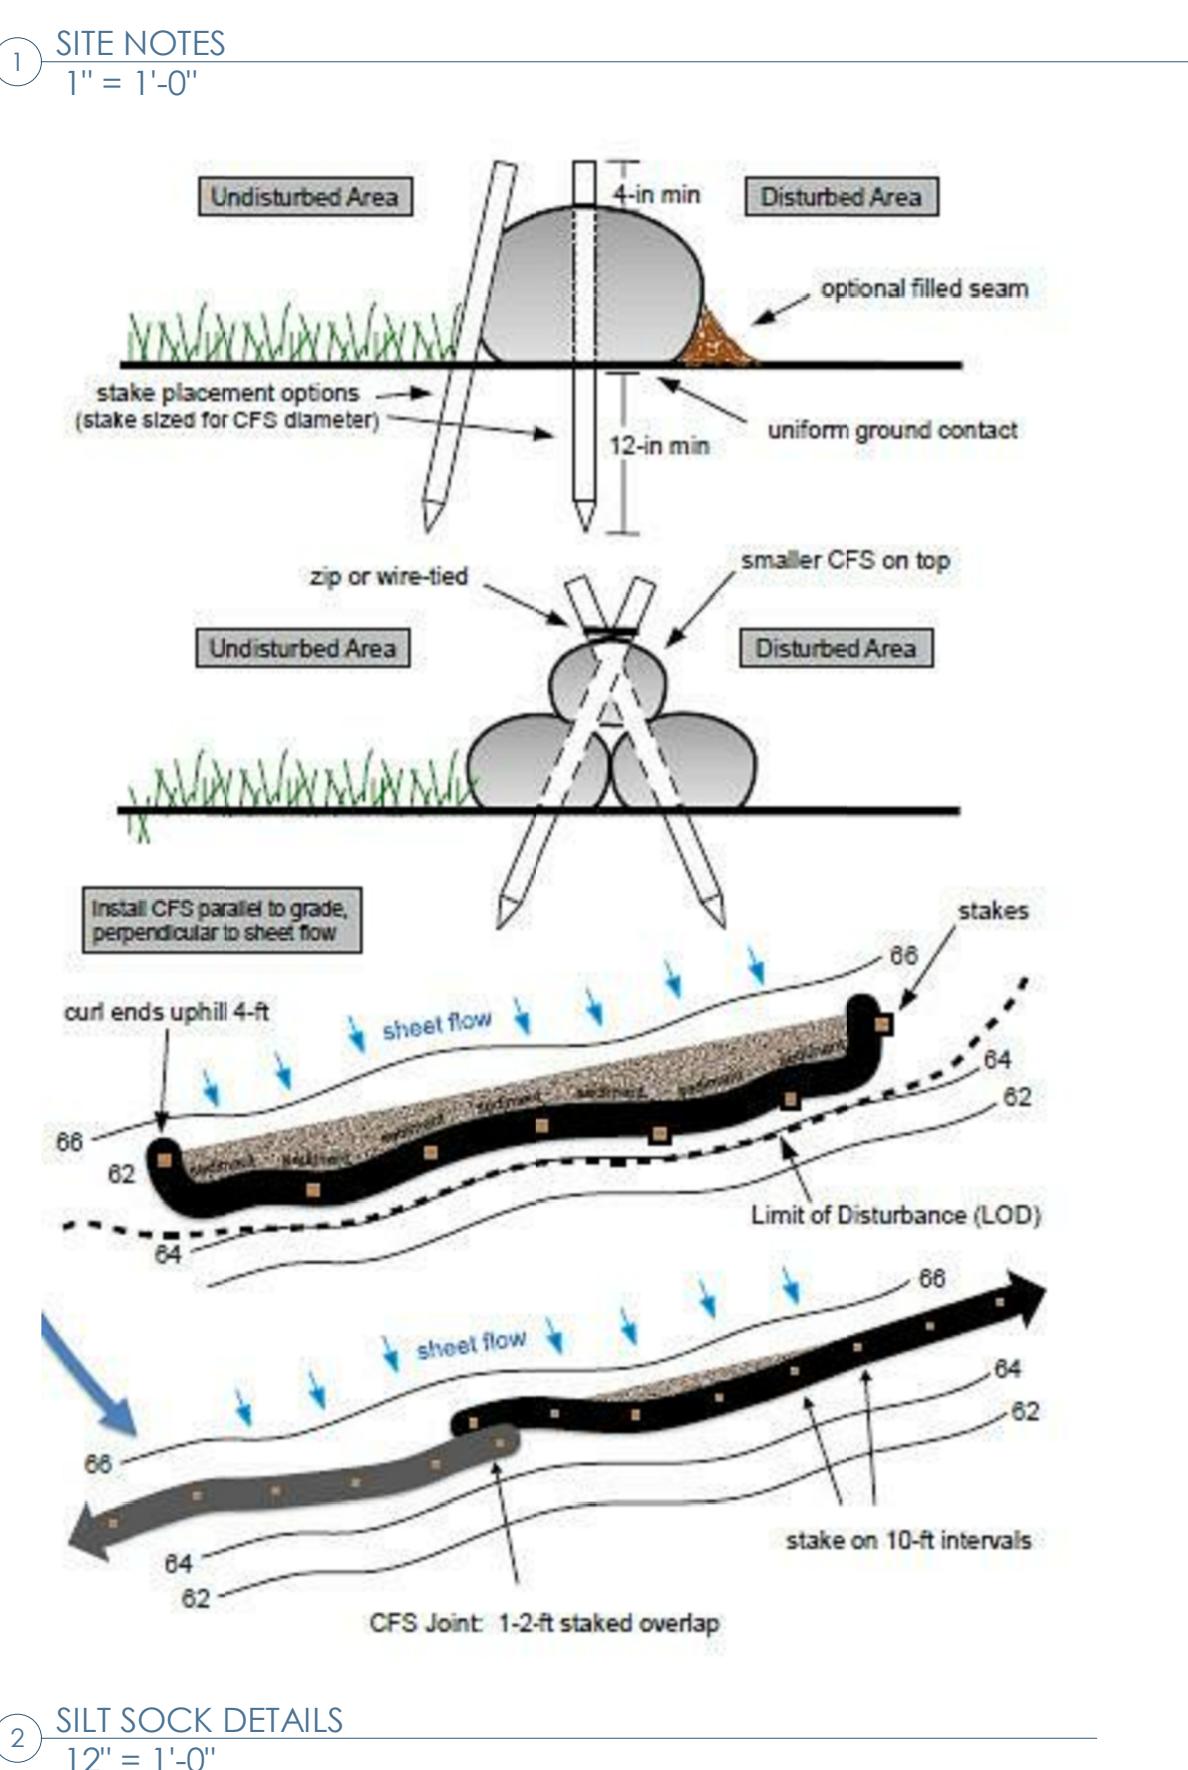

**(1A) SITE PLAN - EROSION CONTROL AND PARTIAL UTILITY PLAN**  
**3/16" = 1'-0"**

**QUAM ENGINEERING, LLC**

Residential and Commercial Site Design Consultants

Civil Engineer: Quam Engineering, LLC

4604 Sigalkow Rd A

McFarland, WI 53558

rquam@quameengineering.com | 608-838-7750

quameengineering.com



**Architect: OpeningDesign**

316 W Washington Ave | Suite 675

Madison, WI 53703

ryan@openingdesign.com | 773.425.6456

openingdesign.com

**AALSETH RESIDENCE - 10/11/2018**  
**3196 AALSETH LN - STOUGHTON, WI 53589**

**A050**